

PLUS Performance – Adheres to Painted and Primed Surfaces

COVE BASE +

Construction Adhesive

Titebond® Cove Base Plus Adhesive is a professional-strength adhesive formulated to provide a fast, strong grab that holds materials firmly in place and eliminates sagging. The advanced formula adheres rubber and vinyl cove base to common building materials and has the added ability to bond to painted and primed surfaces. This VOC-compliant, nonflammable formula is environmentally safe – emitting no harmful fumes and promoting healthy living and working environments. Available with a custom design adhesive application tool that allows for easy, proper application with the full coverage of a trowel.



PLUS Solvent Free


- Interior Vinyl and Rubber
- Eliminates sagging
- Quick grab
- Excellent adhesion
- Cleans easily with water in wet state
- Bonds to all common wall surfaces
- Environmentally safe
- Minimal bracing needed
- Impact-resistant
- VOC-compliant

Recommended For

Commercial and residential installation of rubber, vinyl and carpet cove bases, as well as stair treads.

Compatible Materials

Common wall surfaces including plaster, drywall, gypsum wallboard, plywood, hardboard paneling, tileboard, wood, painted and primed surfaces and concrete.

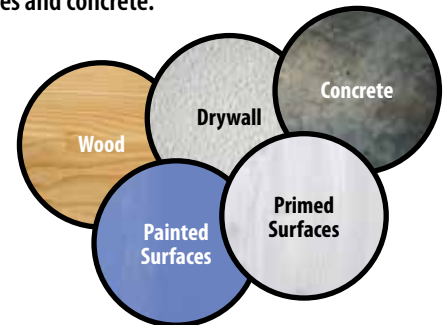

Titebond®

THE PRO'S ADVANTAGE

Ordering/Sku Information

Size	Part Number	UPC	Case UPC	Weight	Units Per Package	Packages Per Pallet
10 Oz. Cartridge	3401	037083034011	10037083034018	12.99 lbs.	12	108
28 Oz. Cartridge	3402	037083034028	10037083034025	34.52 lbs.	12	44
4 Gallon Pail	3404	037083034042	NA	48.95 lbs.	1	36

Technical Information

- **Application Temperature:**
Over 40°F for adhesive and substrates
- **Service Temperature:** 0°F to 120°F
- **Working Time:** 5-10 Minutes

Physical Properties

- **Type:** Polymer emulsion
- **State:** Medium-viscosity mastic
- **Color:** Beige
- **Solids:** 59%
- **Viscosity:** 80,000 cps
- **pH:** 7.0
- **VOC:** < 50 g/L
- **Weight/Gallon:** 11.2 lbs.
- **Flashpoint:** > 200°F
- **Freeze/Thaw Stability:** Stable
- **Storage Life:**
18 months in an unopened container

User Tips

Not designed for continuous submersion.
For best results, store product above 40°F.

Directions

PREP: Surfaces must be clean and free of any material that may prevent adequate adhesion.

APPLICATION: Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal and place in cartridge gun. Apply continuous parallel beads on the back of the cove base approximately 1" to 1 1/2" apart. Press cove base firmly and uniformly against the wall within 5-10 minutes of applying adhesive.

Note: Irregular or curved wall surfaces may require bracing until the adhesive has set.

CLEANUP: Tools and adhesive may be cleaned with water while the adhesive is wet. If dried, tools and adhesive may be cleaned with water/acetone/vinegar mixture. Follow solvent vendor's precautions.

Coverage

Size	1/8" bead	1/4" bead	3/8" bead
10 Oz. Cartridge*	129 ft.	30 ft.	14 ft.
28 Oz. Cartridge†	355 ft.	86 ft.	39 ft.

*Approximately 15 linear feet of 4 inch cove base using a double 1/4 inch bead or zigzag pattern

†Approximately 43 linear feet of 4 inch cove base using a double 1/4 inch bead or zigzag pattern

PLUS
Solvent Free

Visit Titebond.com for the most up-to-date product information.

Franklin International



Columbus, Ohio 43207 614.443.0241 Technical Service 1.800.347.4583 © 2020 01377_4492bcm FF1056

